


■ STOCK No.63215 ■ PART No. HW-DK2
■ STOCK No.63218 ■ PART No. HW-DK5


● INSTALLATION INSTRUCTIONS ●

1. Mark Door

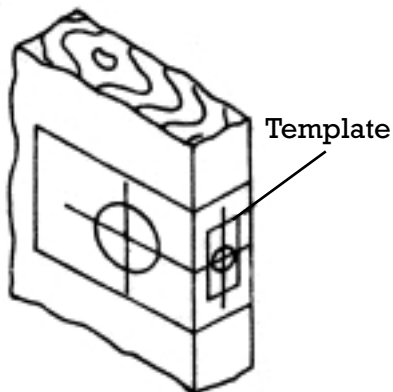


- Mark site of lock using template.

2. Bore Holes

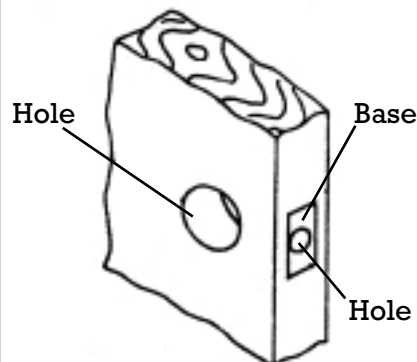


- Bore the holes through the door.
- Cut out base.


3. Install Latch




4. Install Knob 1





5. Install Knob 2

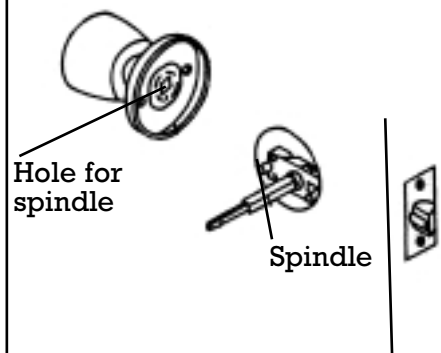

6. Install Strike

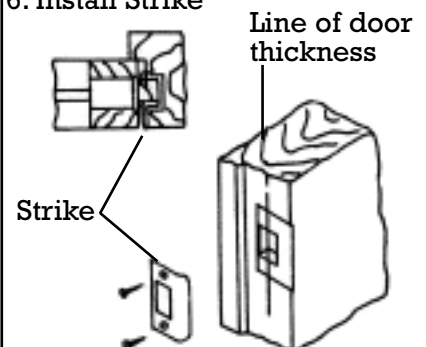

7. Instructions for Adjustable Latch



The cam is pushed fully to the right for 70mm backset. (During the adjustment always keep two teeth of the cam in the forward position).

Push the latch inward, take off the adjustment part for 70mm backset.